


Vírburstar og Nylonburstar “FECIN”

Nylonhjól og -bolli

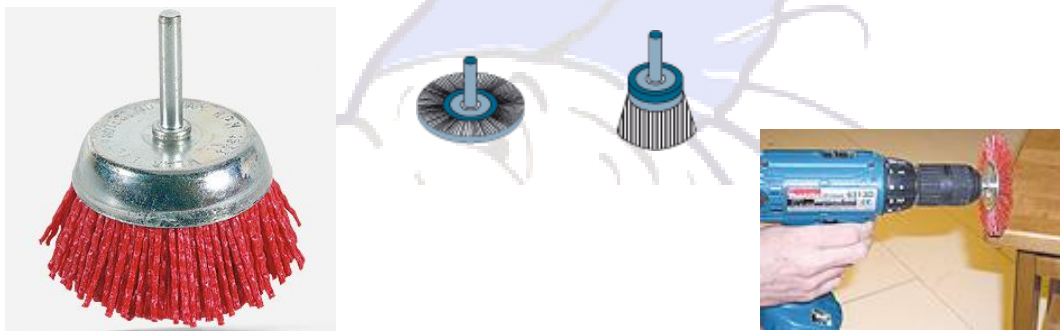

Model	Exterior diameter mm / "		Filament		Presentation Display(Vörunúmer)	Units per box	RPM.	
			Color	Grit			Recom.	Max.
Wheel	75	3"	Red	80	75	12	2.500	4.500
	100	4"	Red		10001		2.500	4.500

Vírbolli finn f/Borvél



Model	Exterior diameter mm. / "	Brass coated steel mm / "	Presentation	Units per box
			Display (Vörunúmer)	
TA	50 / 2"	0,30 / .012"	5030	25
	75 / 3"	0,30 / .012"	7530	

Flókaskífa 100mm m/gati



Vörunúmer: **100**

Flókaskífa 100mm/6mm pinni



Vörunúmer: **100013**

Vírhjól fín m/pinna



Model	Exterior diameter mm. / "	Brass coated steel mm / "	Presentation	Units per box
			Display (Vörunúmer)	
BE	50 / 2"	0,30 / .012"	530	25
	75 / 3"	0,30 / .012"	730	
	100 / 4"	0,30 / .012"	1030	
	Exterior diameter mm./ "	Stainless steel mm./"	Display (Vörunúmer)	25
	30 / 1.3/16"	0,30 / .012"	21034	
	40 / 1.1/2"	0,30 / .012"	21044	
	50 / 2"	0,30 / .012"	21054	
	60 / 2.3/8"	0,30 / .012"	21064	
	75 / 3"	0,30 / .012"	21074	
	100 / 4"	0,30 / .012"	21104	

Virtoppur finn f/Borvél



Model	Exterior diameter mm. / "	Brass coated steel mm / "	Presentation	Units per box
			Display (Vörunúmer)	
BR	26 / 1"	0,30 / .012"	2630	25

Vírbustasett 6mm, 36stk Blandað



Vörunúmer	Innihald (36stk)		Description mm / "	Dimensions mm / "
	Fjöldi	v.nr. hvers og eins		
606	6	530	Wheel 50 / 2"	340 x 340 x 100 mm
		730	Wheel 75 / 3"	
		1030	Wheel 100 / 4"	
		5030	Cup 50 / 2"	13.3/8" x 13.3/8" x 4"
		7530	Cup 75 / 3"	
		2630	End brush / 1"	

Vírburstar M-14 ýmsar stærðar



Model	(d) Diameter r mm / "	(c) Trim length mm / "	Thread	Brass coated steel	Grey steel	Stainless steel	RPM.	
				0,30 mm .012"	0,50 mm .020"	0,30 mm .012"	Recom	Max
Twisted knot cup (Mynd 3)	65 2.3/4"	20 3/4"	M-14		250601	2506018	11.000	15.000
Conical crimped (Mynd 1)	100 4"	24 1"		1510		15108	11.000	13.000
Conical twisted knot (Mynd 4)	100 4"	22 7/8"			1810		11.000	15.000
Wheel crimped (Mynd 2)	115 4.1/2"	25 1"		11501		115	11.000	13.000

Vírbollar snúnir M-14 m/hring



(D) Diameter Exterior mm. / "	Rows	(B) Threaded arbor hole	Vörunúmer	RPM		
			Grey steel	Units per box	Reco men.	Max.
			0,50 mm .020"			
80 / 3.1/4"	1	16-22 5/8"- 7/8"	250801	12	6.500	8.500
100 / 4"			251001		6.500	8.500
125 / 5"		M14 W-5/8	251251	6	5.000	6.500

Vírhjól snúin



(D) Exterior diameter mm / "	No. of knots	(A) Twisted knot width mm / "	Vörunúmer	(S) Trim length mm / "	RPM.	
					Recom.	Max.
150 (M-14)	28	12 / 1/2"	181501	34 / 1.3/8"	5.000	9.000
175 (22,2mm gat)	28	12 / 1/2"	181701	46 / 1.3/4"	4.000	8.500

Vírbolli M-14 Finn




(D) Diameter Exterior mm/ "	(S) Trim length mm/ "	(B) Arbor hole Threaded mm/ "	Vörunúmer		Units Box	RPM.	
			Brass coated steel	Stainless steel		Recom	Max
			0,30 mm .012"	0,30mm .012"			
60 2.3/8"	22 7/8"	*	240600	2406008	12 blister	7.500	11.000
80 3.1/4"	30 1.3/16"	16-22	240800	2408008		5.000	8.500
100 4"	30 1.3/16"	M-14	241000	2410008		4.000	8.500
125 5"	30 1.3/16"	W-5/8	241250		6	3.200	8.500

Röravírburstar



Applications and uses.

- Removal of rust, residues, and adhesions in the interior of pipes and holes (ships, refineries, sugar mills, heating, manufacture of shock absorbers, etc).
- Cleaning of threaded holes.
- Are used by hand as well as mounted to fixed or portable machines.
- The fixing element is a screw situated at the end of the brush.




(D) Diameter Ø mm / "	(L1) Total length mm / "	(L2) Useful length mm / "	(B) Fastening thread	Model F-13 (Vörunúmer)		Units per box
				Brass coated steel		
				Ø 0,30 mm (.012")	Ø 0,40 mm (.016")	
13 (1/2")	140 (5.1/2")	110 (4.3/8")	W 1/4	1301301		12
25 (1")	190	120	W 1/2		1302501	12
50 (2")	7.1/2"	4/34"			1305001	

Vírbursta Borðstandur 72stk f/borðvél



Vörunúmer	Innihald (72stk)		Description	Dimensions mm / "
	Amount	v.nr. hvers og eins		
1206	12	530	Wheel 50 / 2"	690 X 440 X 320 mm
		730	Wheel 75 / 3"	
		1030	Wheel 100 / 4"	
		5030	Cup 50 / 2"	27" x 17.3/8" x 12.5/8"
		7530	Cup 75 / 3"	
		2630	End brush / 1"	

Vírburstar margar raðir

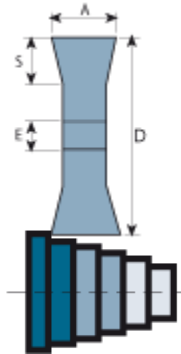

Applications and uses.

- Removal of rust, burrs, paint, scale, cleaning cast parts, brushing skins and leathers.
- Preparation of casings for retreating.
- Recovery of bottles.
- The greater the number of rows the greater the wire density will be.
- The brushing of stainless steel surfaces should be done with stainless wire.
- When anti-spark material is required, brass wire must be used.

(D) Diameter Exterior mm / "	(S) Trim length mm / "	Vörunúmer Width Code / mm / "		Units Box	RPM.	
		5 raða	8 raða		Recom.	Max.
100 (4")	18 (11/16")	151005 (16-5/8")		12	3.800	6.500
125 (5")	30 (1.5/32")	151205 (20-3/4")			3.000	6.500
150 (6")	28 (1.1/8")	151505 (20-3/4")	151508 (25-1")	6	2.500	6.500
175 (7")	40 (1.1/2")	151705 (22-7/8")	151708 (28-1.1/8")		2.200	6.500
200 (8")	40 (1.1/2")	152005 (22-7/8")	152008 (28-1.1/8")		2.000	4.500

Vírhjól RYÐF.Snú.115/,5mm M-14



Vörunúmer: **1158**

Vírdisk.Snú.RYDF.M-14.100/5mm



Vörunúmer: 18108

Nylon-bolli f/borvél



6x50mm : **Vörunúmer: 501**

6x75mm : **Vörunúmer: 751**